





Manual Bracket Adapter Setup Instructions

The shim plates should be placed on the pallet while at the machine. Put the pallet onto the arm and adjust it to it's normal printing location.

With the pallet on the arm and in correct position - look under the pallet to make a mental note of the best position for the brackets. Towards the rear and close together is usually best for minimizing snag issues with shirts.

Strategically Locate your Shim Plates

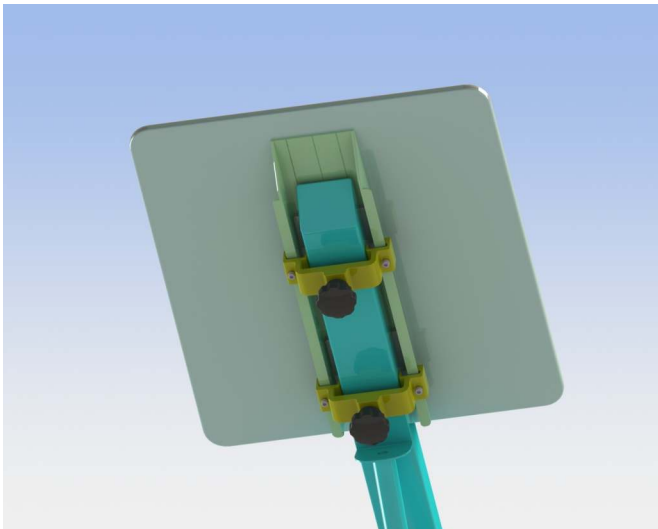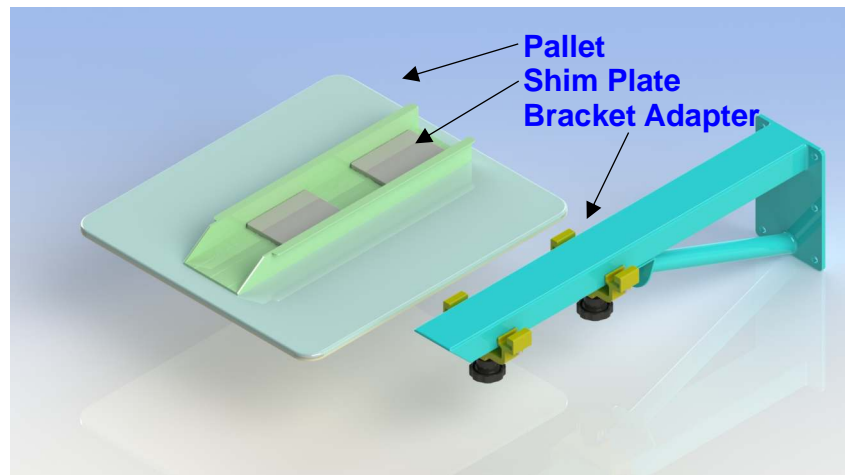


Remove the peel away liner from the shim plate and stick it on the inside of the bracket at the predetermined location. Place the pallet on the arm. Press down firmly for the pressure sensitive tape to be most effective

From the front of the arm - slide the bracket adapter over both the arm and bracket to the position of the shim plate. Tighten the knobs after both bracket adapters are centered over the shim plates.

For the most accuracy - before tightening the knobs - push the pallet in the direction that you normally index and then tighten the knobs.

Your manual Bracket Adapters can be removed from the pallet for easy storage or fixed into position on the pallet for easy setup on the next job. To lock the brackets in location - tighten the set screws (see picture at right).

Locking the brackets makes it easier to use on the next job. However - they are easier to store and keep safe when the brackets are removed.

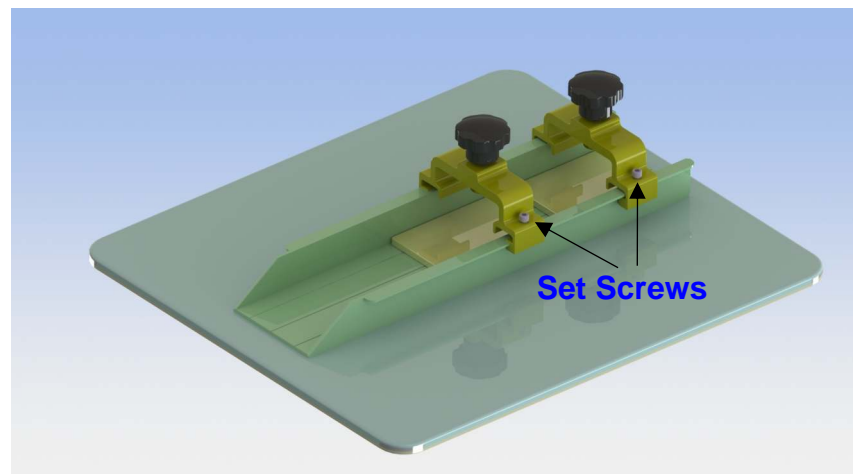

Standard and Specialty Application
Production Accessories for Textile Printing