





READ FIRST

4880 INK INSTALLATION GUIDE


1. Ensure the printer power is on. Press the ink compartment cover to release the latch and open the cover.

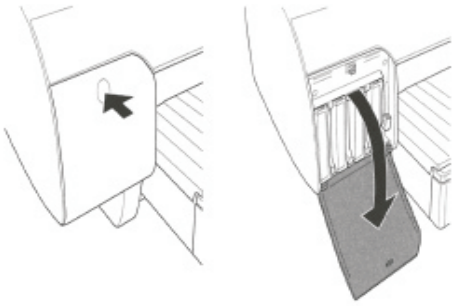

2. Raise both ink levers. These are located on the right side of each ink cartridge compartment.




3. Install the ink cartridges into the color-coded slots




Note: The cartridge label should be facing left as the cartridge is inserted into its slot.


4. After all eight cartridges are installed, lower the ink levers.

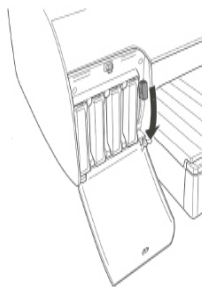


5. After approximately 1 minute, ink lever messages will appear on the LCD panel. The LCD will indicate that the printer recognized "NON-GENUINE" ink cartridges.

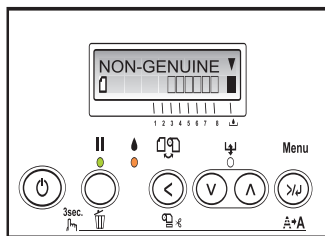


6. Press the down key (V) until a message appears that asks the user whether the ink cartridges are "NON-GENUINE".

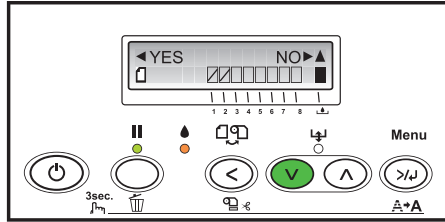


7. Press the left key (<) to acknowledge that the cartridges are "NON-GENUINE".

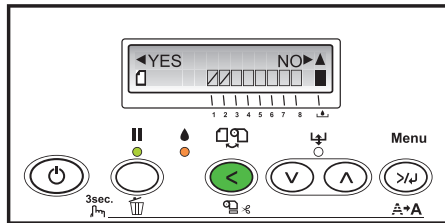


8. Press the left key (<) until the following message appears:

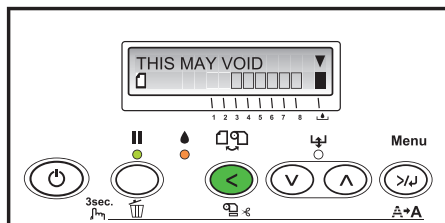



9. Press the down key (V) until the following message appears:

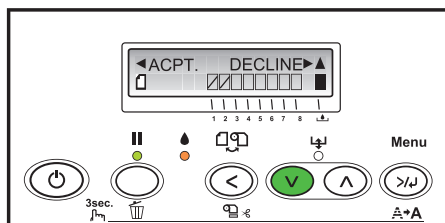


10. Press the left key (<) to accept acknowledgement of the warranty message.

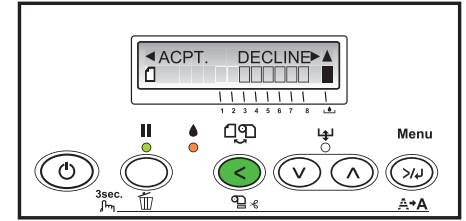


11. The following messages will appear:

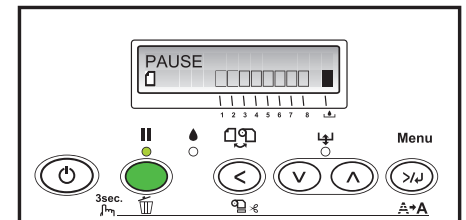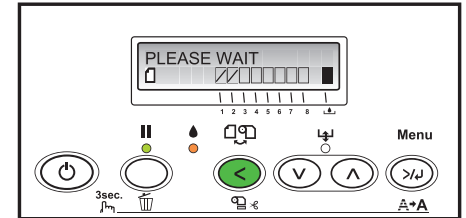

12. Press the PAUSE key once.

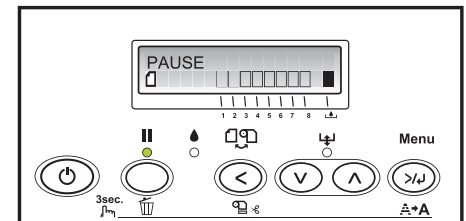

13. The following message will appear. The printer is now ready for use.

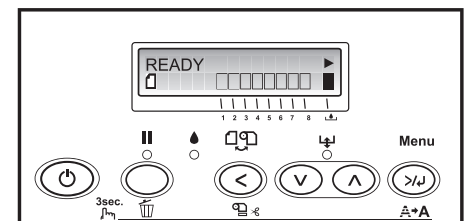

NOTE:

If you are using a hybrid printer-
 Sublimation slots 1-4
 Chromablast slots 5-8
 Blackmax installs according to the
 color slot on the cartridge.